



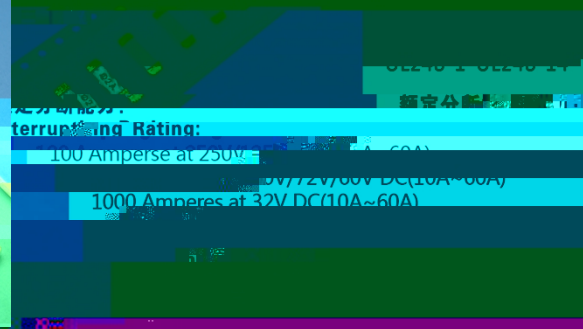

## 贴片保险丝(抗浪涌型) 35 PHS-Compliant

SMD Fuse (High let through current Ultrafast) 250V/125°C

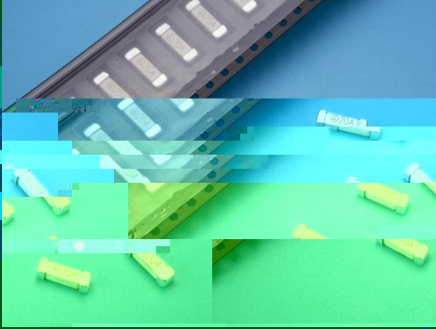

额定分断能力:

Interrupting Rating:

100 Amperes at 250V AC (10A~60A)

1000 Amperes at 32V DC (10A~60A)

End cap: Ag plated brass

